


FOLDING SHOWER SEATS
ORDERING OPTIONS

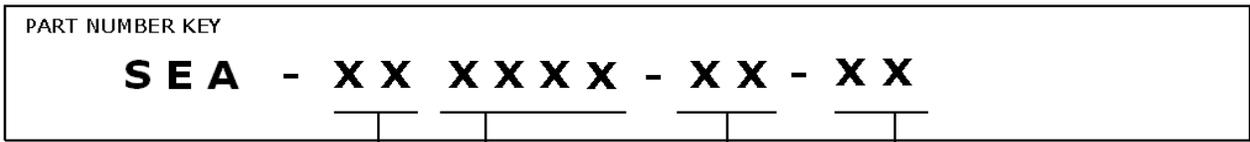

FRAME STYLE:
SWING DOWN LEGS: SD
WALL BRACKET: WB
BRACKETLESS: BL


DIMENSIONS:
XXXX

Custom dimensions available

SHAPE:
LEFT HAND: LH
RIGHT HAND: RH
RECTANGULAR: NH

MATERIAL (TOP):
PADDED: PA
PHENOLIC WHITE: PH
PHENOLIC WOODGRAIN: PW
HDPE: HD
NO TOP (FRAME ONLY): NO

Custom colors available

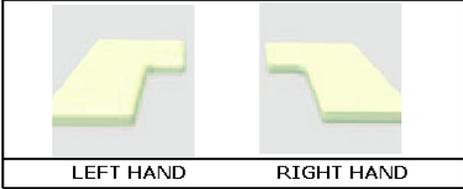

EXAMPLE: SEA - SD 26 21 - LH - PA
SEAT WITH SWING DOWN LEGS, 26"L x 21"D, LEFT HAND CONFIGURATION, PADDED


OPERATION & INSTALLATION:
In accordance with ADA requirements, the seat can be raised and lowered with less than 5 pounds of force. Mounting bracket provides smooth, uniform resistance. Positive friction allows the seat to remain securely in the raised position preventing accidental lowering. When installed correctly CSI Shower Seats will support a static load in excess of 400 Lbs.

Every seat installation requires reinforced wall backing. It is the responsibility of the designers, builders and installers to evaluate the application and the wall to specify the appropriate fasteners. Grab bars should be specified with shower seats. consult local building codes and current ADA requirements to assure compliance.

STANDARD FEATURES:
Manufactured with precision and quality, all CSI shower seats are constructed of 304 Stainless Steel. Tubing is at least 18 gauge (1.2mm) with heliarc welding.


Frame - 1.25" square tubing main support with 1" round tube cross braces
Wall Flanhes - Two 3" diameter x 10 gauge plates each with 2 mounting holes
Hinge - 1" round tube with 90 degree bend welded to 1.25" round 12 gauge rotary hinge
Support - Bent 1" diameter round tubing welded to 12 gauge rotary hinges
Wall Bracket - Constant friction guide bracket allows seat to securely rest in the raised position
Swing Down Legs - Adjustable height rubber feet

FOLDING SHOWER SEATS
STANDARD CONFIGURATIONS

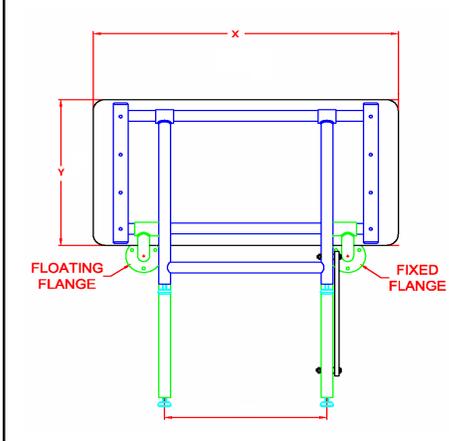


SD: SWING DOWN LEGS

SEA-SD2216	x=22"	y=16"
SEA-SD2416	x=24"	y=16"
SEA-SD2621	x=26"	y=21"
SEA-SD2821	x=28"	y=21"
SEA-SD3021	x=30"	y=21"
SEA-SD3221	x=32"	y=21"
SEA-SD3421	x=34"	y=21"

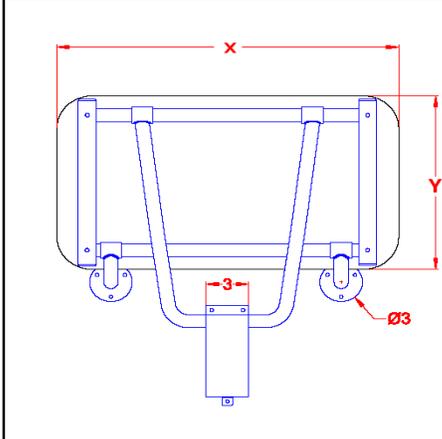

WB: WALL BRACKET

SEA-WB2216	x=22"	y=16"
SEA-WB2416	x=24"	y=16"
SEA-WB2621	x=26"	y=21"
SEA-WB2821	x=28"	y=21"
SEA-WB3021	x=30"	y=21"
SEA-WB3221	x=32"	y=21"
SEA-WB3421	x=34"	y=21"

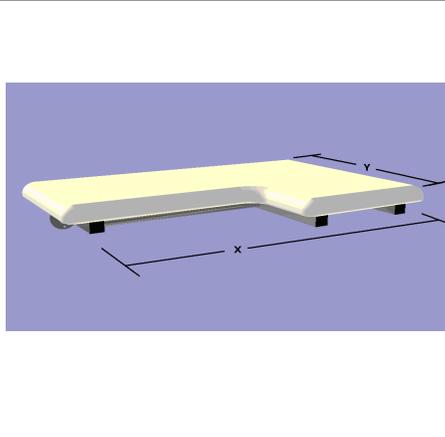

BL: BRACKELESS FRAME

SEA-BL2216	x=22"	y=16"
SEA-BL2416	x=24"	y=16"
SEA-BL2621	x=26"	y=21"
SEA-BL2821	x=28"	y=21"
SEA-BL3021	x=30"	y=21"
SEA-BL3221	x=32"	y=21"
SEA-BL3421	x=34"	y=21"